


PTO GEAR PUMP RANGE

Pump Specifications

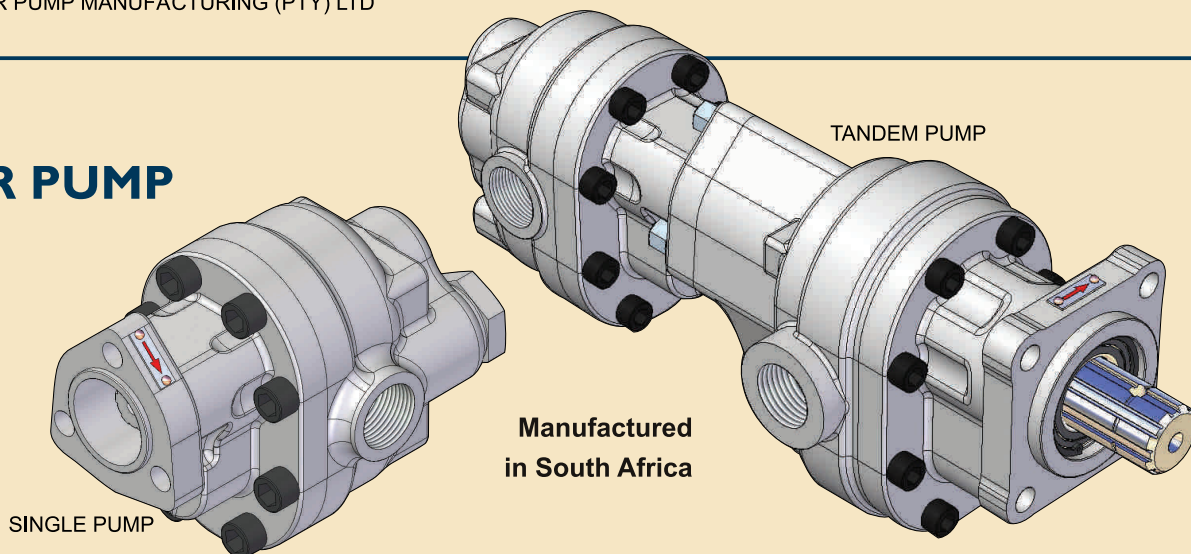

Manufactured
in South Africa

GP3 SINGLE PUMP

	cc/rev	Lpm (at 1000rpm)	cu in (cu in/rev)	Max Pressure (bar)	Max Pressure (psi)	Max Speed (rpm)	Pump Weight (kg)
024	24.10	24.10	1.48	300	4300	3000	9.20
032	32.20	32.20	1.97	300	4300	3000	9.75
040	40.30	40.30	2.46	300	4300	3000	10.00
048	48.30	48.30	2.96	300	4300	3000	10.65
052	52.10	52.10	3.19	300	4300	2400	11.25
062	62.60	62.60	3.82	300	4300	2400	11.85
073	73.50	73.50	4.49	270	3900	2400	15.00
080	80.60	80.60	4.92	270	3900	2400	15.15
088	88.00	88.00	5.37	270	3900	2400	15.25
102	102.00	102.00	6.22	240	3500	2400	15.90
118	118.00	118.00	7.20	240	3500	2400	16.25
132	132.60	132.60	8.09	220	3200	2400	16.30
147	147.00	147.00	8.97	200	3000	2400	17.30

GP3T TANDEM PUMP

	cc/rev	Lpm (at 1000rpm)	cu in (cu in/rev)	Max Pressure (bar)	Max Pressure (psi)	Max Speed (rpm)	Pump Weight (kg)
052	52.10	52.10	3.19	300	4300	2400	12.90
062	62.60	62.60	3.82	300	4300	2400	13.65
073	73.50	73.50	4.49	270	3900	2400	16.10
080	80.60	80.60	4.92	270	3900	2400	16.55
088	88.00	88.00	5.37	270	3900	2400	16.80

THE ABOVE DATA ARE AVERAGE RESULTS BASED ON A SERIES OF TESTS AND ARE NOT NECESSARILY REPRESENTATIVE OF ANY SINGLE UNIT. GEAR PUMP MANUFACTURING RESERVES THE RIGHT TO AMEND THE TECHNICAL DATA WITHOUT NOTICE.

SINGLE PUMP ORDER CODES - EXAMPLE:


GP3	080	D	R
SERIES	SIZE	MOUNT	ROTATION
	024 032 040 048 052 062 073 080 088 102 118 132 147	D (DIN 4 bolt) U (UNI 3 bolt) S (SAE B 2 bolt) A (AUS 4 bolt)	L (Left hand / Counterclockwise) R (Right hand / Clockwise)

TANDEM PUMP ORDER CODES - EXAMPLE:

GP3T	080	032	D	R
SERIES	FRONT SIZE	REAR SIZE	MOUNT	ROTATION
	052 062 073 080 088	024 032 040 048 052 062 073 080	D (DIN 4 bolt)	L (Left hand / Counterclockwise) R (Right hand / Clockwise)


Useful Formulae	To Convert	Inches	Bar	Cu In/rev	US GPM	US GPM	kg
	Into	Millimeters	Psi	cc/rev	Cu In/rev	cc/rev	lbs
	Multiply by	25.4	14.5	16.39	2.31	3.785	2.205

PTO GEAR PUMP OPTIONS




DIN

MOUNT 4 Holes (80 x 80)
PCD 113,5 mm
SPIGOT 80 mm
SHAFT 8 Spline
SHAFT OD 34,8 mm




UNI

MOUNT 3 Holes
PCD 72 mm
SPIGOT 52 mm
SHAFT 6 Spline
SHAFT OD 24,6 mm







SAE

MOUNT 2 Holes
PCD 146 mm
SPIGOT 101,6 mm
SHAFT 13 Spline
SHAFT OD 22,2 mm



AUS

MOUNT 4 Holes (58 X 58)
PCD 82,5 mm
SPIGOT 62 mm
SHAFT 8 Spline
SHAFT OD 22 mm



PORTING SIZES

SINGLE PUMP PORTING							
DIN and UNI				SAE and AUS			
Size	Inlet Side	Outlet 1 Side	Outlet 2 Rear	Size	Inlet Rear	Outlet 1 Rear	Outlet 2 Side
GP3-024	1" bsp	3/4" bsp	3/4" bsp	GP3-024	1 1/4" odt	3/4" odt	3/4" odt
GP3-032	1" bsp	3/4" bsp	3/4" bsp	GP3-032	1 1/4" odt	3/4" odt	3/4" odt
GP3-040	1" bsp	3/4" bsp	3/4" bsp	GP3-040	1 1/4" odt	3/4" odt	3/4" odt
GP3-048	1" bsp	3/4" bsp	3/4" bsp	GP3-048	1 1/4" odt	3/4" odt	3/4" odt
GP3-052	1" bsp	1" bsp	1" bsp	GP3-052	1 1/4" odt	3/4" odt	3/4" odt
GP3-062	1" bsp	1" bsp	1" bsp	GP3-062	1 1/4" odt	3/4" odt	3/4" odt
GP3-073	1 1/4" bsp	1" bsp	1" bsp	GP3-073	1 1/4" odt	3/4" odt	3/4" odt
GP3-080	1 1/4" bsp	1" bsp	1" bsp	GP3-080	1 1/2" odt	1" odt	1" odt
GP3-088	1 1/4" bsp	1" bsp	1" bsp	GP3-088	1 1/2" odt	1" odt	1" odt
GP3-102	1 1/4" bsp	1" bsp	1" bsp	GP3-102	1 1/2" odt	1" odt	1" odt
GP3-118	1 1/4" bsp	1" bsp	1" bsp	GP3-118	1 1/2" odt	1" odt	1" odt
GP3-132	1 1/2" bsp	1" bsp	1" bsp	GP3-132	1 1/2" odt	1" odt	1" odt
GP3-147	1 1/2" bsp	1" bsp	1" bsp	GP3-147	1 1/2" odt	1" odt	1" odt
TANDEM PUMP PORTING							
Front Pump				Rear Pump			
Size	Inlet Side	Outlet Rear		Size	Inlet Side	Outlet 1 Side	Outlet 2 Rear
GP3T-052	1" bsp	1" bsp		GP3-024	1" bsp	3/4" bsp	3/4" bsp
GP3T-062	1" bsp	1" bsp		GP3-032	1" bsp	3/4" bsp	3/4" bsp
GP3T-073	1 1/4" bsp	1" bsp		GP3-040	1" bsp	3/4" bsp	3/4" bsp
GP3T-080	1 1/4" bsp	1" bsp		GP3-048	1" bsp	3/4" bsp	3/4" bsp
GP3T-088	1 1/4" bsp	1" bsp		GP3-052	1" bsp	1" bsp	1" bsp
				GP3-062	1" bsp	1" bsp	1" bsp
				GP3-073	1 1/4" bsp	1" bsp	1" bsp
				GP3-080	1 1/4" bsp	1" bsp	1" bsp